


With our **MResist SUPREME** you can enjoy even finest details and spatial information which normally get lost. Due to the complex bifilar structure from 1Ω with two wires being wound around the high-temperature-resistant cement element simultaneously the inductance is always below 75µF.

In addition, the **MResist SUPREME** series features acoustic neutrality and music reproduction close to reality. This is due to a special manually applied fire-resistant casting compound which optimally fixes and stabilises the resistor winding thus protecting it against microphony effects.

In order to maintain high sound quality even at high load, we apply a special copper-nickel alloy as conducting material featuring a positive and extremely low temperature coefficient of only **50ppm/°C**.

Further details which guarantee that **MResist SUPREME** resistors are hardly noticeable anymore are the use of non-magnetic materials and welded contacts.

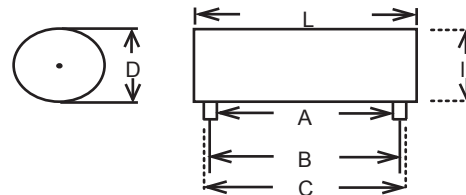

Type	D [mm]	L [mm]	Wire Ø * l [mm]	A [mm]	B [mm]	C [mm]
MRES20	11	51	1.0 * 30	32	39	45

MRES20
Audiophile-resistors, non-magnetic,
non-inductive, 50ppm/°C, 20 watt

Ohm	[€]
[◇] ±2%	
0,10	10,90 €
0,22	10,90 €
0,33	10,90 €
0,47	10,90 €
0,68	10,90 €
1,0	11,90 €
1,2	11,90 €
1,5	11,90 €
1,8	11,90 €
2,2	11,90 €
2,7	11,90 €
3,3	11,90 €
3,9	11,90 €
4,7	11,90 €
5,6	11,90 €
6,8	11,90 €
8,2	11,90 €
10	11,90 €
12	11,90 €
15	11,90 €
18	11,90 €
22	11,90 €
27	11,90 €
33	11,90 €